

# FRED 2 – An Immunoinformatics Framework for Python

Benjamin Schubert<sup>1,2,\*</sup>, Mathias Walzer<sup>1,2</sup>, Hans-Philipp Brachvogel<sup>1</sup>, András Szolek<sup>1,2</sup>, Christopher Mohr<sup>1,2</sup>, and Oliver Kohlbacher<sup>1,2,3,4,5</sup>

<sup>1</sup>Center for Bioinformatics, University of Tübingen, 72076 Tübingen, Germany

<sup>2</sup>Applied Bioinformatics, Dept. of Computer Science, 72076 Tübingen, Germany

<sup>3</sup>Quantitative Biology Center, 72076 Tübingen, Germany

<sup>4</sup>Faculty of Medicine, University of Tübingen, 72076 Tübingen, Germany

<sup>5</sup>Biomolecular Interactions, Max Planck Institute for Developmental Biology, 72076 Tübingen, Germany

Associate Editor: Prof. Alfonso Valencia

## ABSTRACT

### Summary:

Immunoinformatics approaches are widely used in a variety of applications from basic immunological to applied biomedical research. Complex data integration is inevitable in immunological research and usually requires comprehensive pipelines including multiple tools and data sources. Non-standard input and output formats of immunoinformatics tools make the development of such applications difficult. Here we present FRED 2, an open-source immunoinformatics framework offering easy and unified access to methods for epitope prediction and other immunoinformatics applications. FRED 2 is implemented in Python and designed to be extendable and flexible to allow rapid prototyping of complex applications.

**Availability:** FRED 2 is available at <http://fred-2.github.io>

**Contact:** [schubert@informatik.uni-tuebingen.de](mailto:schubert@informatik.uni-tuebingen.de)

**Supplementary information:** Supplementary data are available at *Bioinformatics* online.

## 1 INTRODUCTION


The field of immunoinformatics has matured over the last decades. Epitope prediction methods are now widely used and have been successfully applied in many areas from basic immunological to translational research (Boisguérin, et al., 2014; Shukla, et al., 2015).

However, these applications often require complex pipelines combining multiple tools, multiple data sources, and extensive pre- and post-processing. Furthermore, many of the HLA epitope prediction tools do not offer a unified interface and output format, which makes it difficult to use prediction methods interchangeably. One way to overcome these problems are web-based workbenches like the ones offered by IEDB (Vita, et al., 2015) or EpiToolKit (Schubert, et al., 2015). But often data volume, speed, or legal restrictions (e.g., concerning data privacy) prevent the use of such applications.

Also, web-based workbenches usually provide only limited or delayed integration of novel resources and methods. We therefore developed FRED 2 (FRamework for Epitope Detection), an open-source, Python-based framework for computational immunology. FRED 2 is the (completely re-implemented) successor of FRED (Feldhahn, et al., 2009) and provides a unified interface to many prediction tools. We implemented routines covering data pre-processing, HLA typing, epitope prediction, epitope selection, as well as epitope assembly. FRED 2 is flexibly designed to allow easy extension. By building on top of popular modules such as BioPython (<http://biopython.org>) and Pandas (<http://pandas.pydata.org>), FRED 2 allows rapid prototyping of complex and innovative immunoinformatics applications.

## 2 IMPLEMENTATION

FRED 2 covers four major areas of immunoinformatics: T-cell epitope prediction, epitope selection, epitope assembly, and HLA typing (Figure 1). Prediction methods are split into three packages *EpitopePrediction*, *TAP-Prediction*, and *CleavagePrediction*, each providing factory classes as entry points for the supported prediction methods. A detailed overview of the supported prediction methods can be found in supplementary Table S1. OptiTope (Toussaint and Kohlbacher, 2009), a highly flexible mathematical framework capable of expression various aspects of epitope-based vaccines, was implemented for epitope selection. To enable epitope assembly, FRED 2 implements the traveling-salesperson (TSP) approach proposed by Toussaint et al. (Toussaint, et al., 2011) and OptiVac (Schubert and Kohlbacher, 2016) for string-of-beads design with optimal spacer sequences, which is similar to the approach taken in (Antonets and Bazhan, 2013). For HLA typing, FRED 2 provides wrapper methods for many HLA typing approaches, such as OptiType (Szolek, et al., 2014), Polysolver (Shukla, et al., 2015), seq2HLA (Boegel, et al., 2013), and ATHLATES (Liu, et al., 2013). FRED 2 also offers methods to interact with many biological databases like BioMart, UniProt, RefSeq, and Ensembl. It provides support for handling sequence variations at all major biological levels, from transcript, protein, to peptide level. FRED 2 is open-source

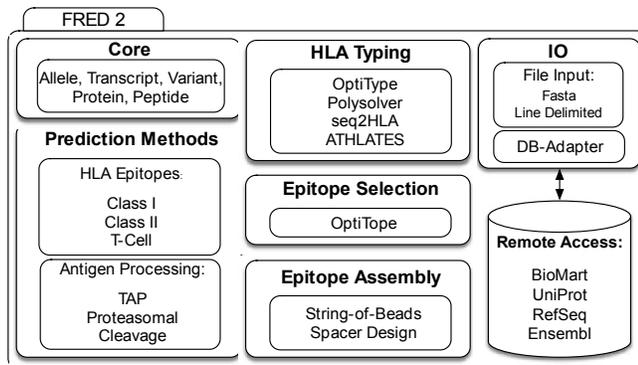

**Figure 1:** Schematic overview of FRED 2. FRED 2 is organized into modules dealing with epitope, cleavage, and TAP prediction, HLA typing, epitope selection, and assembly. The framework also offers accession to biological databases.

software and released under a three-clause BSD license. It was designed to be open and easily extendable by providing self explanatory interfaces so that implementation of new functionalities by a wider community can be easily accomplished.

### 3 APPLICATIONS

A typical application of immunoinformatics is population-based vaccine design. In the following we show how to perform this task using FRED 2. Given a target population represented by their HLA alleles and virus proteins of interest, OptiTope (Toussaint and Kohlbacher, 2009) can be used to select the most immunogenic epitopes that are constrained to cover at least a fraction of HLA alleles and antigens. The immunogenicity of the epitopes can be approximated using NetMHC (Lundegaard, et al., 2008) or similar prediction tools supported by FRED 2. All prediction methods can interact with FRED 2s implementation of OptiTope, overcoming previous limitations of the tool (Toussaint and Kohlbacher, 2009). The described approach and the corresponding FRED 2 implementation can be found in Listing 1.

**Listing 1:** Population-based vaccine design with FRED 2

```

1. #read in virus proteins of interest
2. prots=IO.read_fasta("./proteins.fasta",in_type=Protein)
3. #read in HLA alleles of target population
4. hlas=IO.read_line("./europe_hlas.txt",in_type=Allele)
5. #generate 9mer peptides from proteins
6. peps=Generator.generate_peptides_from_proteins(prots,9)
7.
8. #predict binding affinity
9. netMHC=EpitopePredictionFactory("NetMHC")
10. aff=netMHC.predict(peps, alleles=hlas)
11. #initialize OptiTope and select up to 10 epitopes.
12. #assume a binding threshold of 500nM=0.425 NetMHC score
13. opt=OptiTope(aff, threshold={a:0.425 for a in hlas})
14. opt.set_k(10)
15. opt.activate_antigen_coverage_const(0.8)
16. opt.activate_allele_coverage_const(0.9)
17. selection=opt.solve()

```

Other tutorials in form of IPython notebooks, as well as detailed documentation of the source code can be found on FRED 2's GitHub repository (<http://fred-2.github.io>).

### 4 CONCLUSION

We present FRED 2, a versatile immunoinformatics software framework enabling a unified interface to many tools, from epitope prediction, HLA typing, to epitope selection and assembly. Its openness and easy extensibility makes FRED 2 a perfect instrument for the development of advanced immunoinformatics pipelines that are needed for example in cancer immunotherapy development and other areas of personalized medicine.

### AUTHORS' CONTRIBUTIONS

BS, MW, and OK designed the framework. BS, MW, HPB, AS, and CM implemented it. BS and MW tested the framework. BS, MW, and OK wrote the paper. All authors read and approved the manuscript.

**Funding:** This project has received funding from the *European Union's Horizon 2020 research and innovation programme* under grant agreement No. 633592 (APERIM). OK acknowledges funding from DFG (SFB685/B1).

**Conflict of Interest:** none declared.

### REFERENCES

- Antonets, D.V. and Bazhan, S.I. PolyCTLDesigner: a computational tool for constructing polyepitope T-cell antigens. *BMC research notes* 2013;6(1):407.
- Boegel, S., et al. HLA typing from RNA-Seq sequence reads. *Genome Medicine* 2013;4(12):102.
- Boisguérin, V., et al. Translation of genomics-guided RNA-based personalised cancer vaccines: towards the bedside. *British journal of cancer* 2014;111(8):1469-1475.
- Feldhahn, M., et al. FRED—a framework for T-cell epitope detection. *Bioinformatics* 2009;25(20):2758-2759.
- Liu, C., et al. ATHLATES: accurate typing of human leukocyte antigen through exome sequencing. *Nucleic acids research* 2013;41(14):e142-e142.
- Lundegaard, C., et al. NetMHC-3.0: accurate web accessible predictions of human, mouse and monkey MHC class I affinities for peptides of length 8–11. *Nucleic acids research* 2008;36(suppl 2):W509-W512.
- Schubert, B., et al. EpiToolKit—a web-based workbench for vaccine design. *Bioinformatics* 2015;31(13):2211-2213.
- Schubert, B. and Kohlbacher, O. Designing string-of-beads vaccines with optimal spacers. *Genome Medicine* 2016;8(1):1-10.
- Shukla, S.A., et al. Comprehensive analysis of cancer-associated somatic mutations in class I HLA genes. *Nat Biotech* 2015;advance online publication.
- Szolek, A., et al. OptiType: precision HLA typing from next-generation sequencing data. *Bioinformatics* 2014;30(23):3310-3316.
- Toussaint, N.C. and Kohlbacher, O. OptiTope—a web server for the selection of an optimal set of peptides for epitope-based vaccines. *Nucleic acids research* 2009;37(suppl 2):W617-W622.
- Toussaint, N.C., et al. Universal peptide vaccines—Optimal peptide vaccine design based on viral sequence conservation. *Vaccine* 2011;29(47):8745-8753.
- Vita, R., et al. The immune epitope database (IEDB) 3.0. *Nucleic acids research* 2015;43(D1):D405-D412.